


# MODEL 4836-P




**BLAST-IT-ALL®**  
Salisbury, NC 28145  
(800) 535-2612  
[www.blast-it-all.com](http://www.blast-it-all.com)  
[sales@blast-it-all.com](mailto:sales@blast-it-all.com)

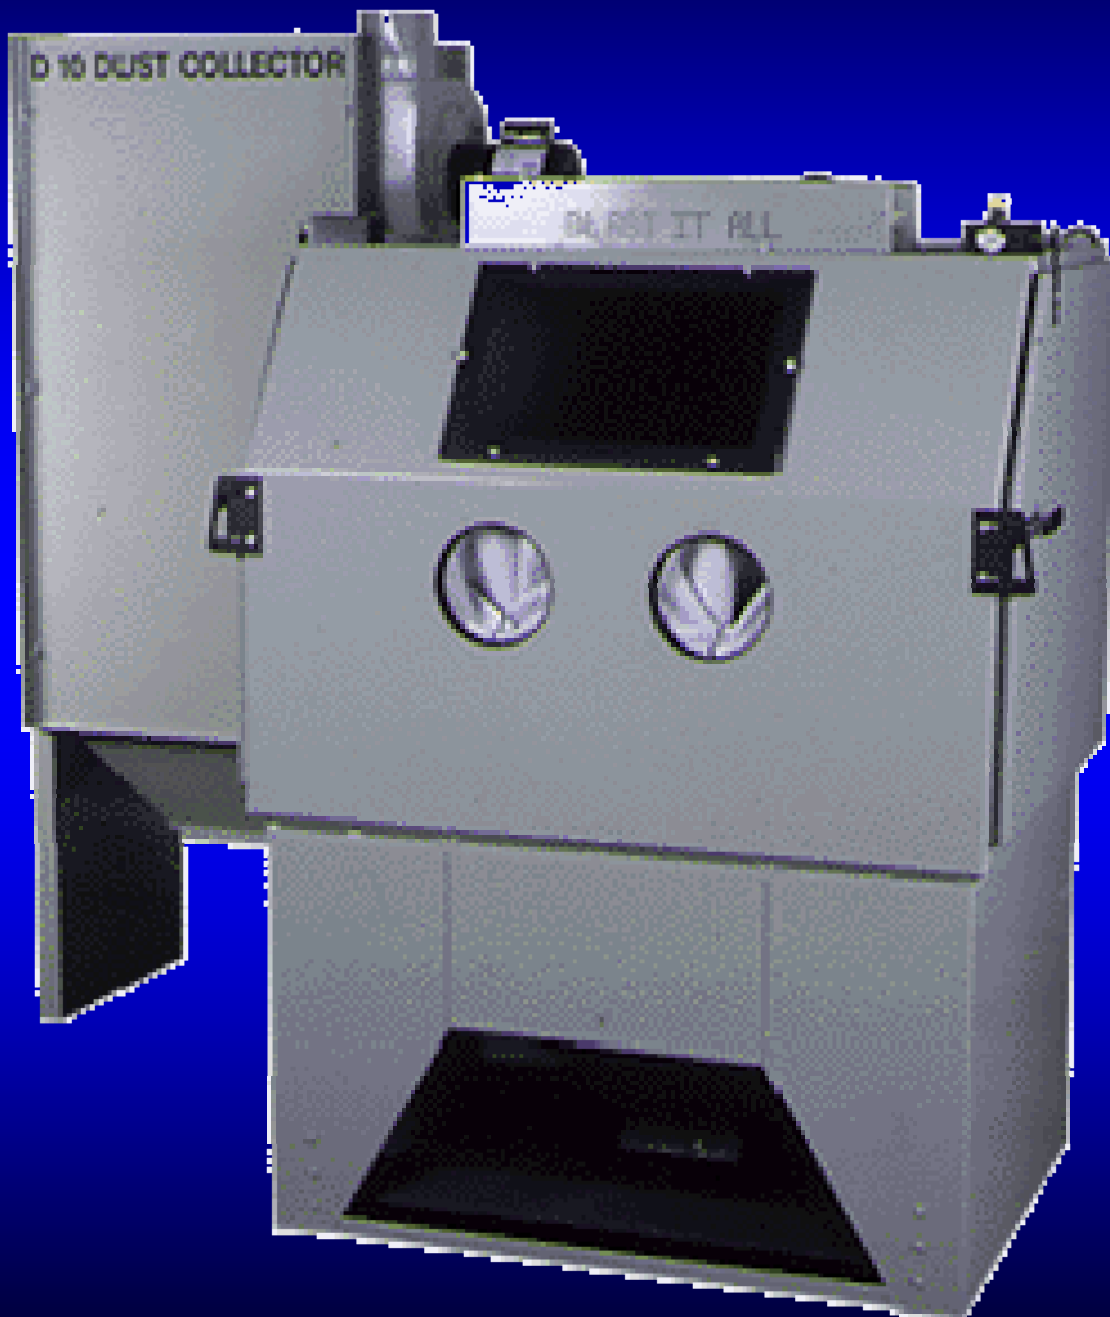

# 4836P TECHNICAL SPECIFICATIONS

## 4836P Cabinet with Reclaimer and Dust Collectors



**RECLAIMER AND DUST COLLECTOR**

MODEL NUMBER	RECLAIMER CFM	DUST COLLECTOR	ESTIMATED SHIPPING WEIGHT	FLOOR AREA REQUIRED (W)	FLOOR AREA REQUIRED (D)
4836P-7	700	BAG	625	117"	64"
4836P-7DC	700	D10 DC	950	117"	108"
4836P-7M2DC	700	M2DC	1150	117"	108"
4836P-9D20-3	900	D20 DC	1175	117"	108"
4836P-9M4DC-3	900	M4DC	1200	117"	108"
4836P-9RPJ2DC-3	900	RPJ2	1200	117"	108"
4836P-9RPJH2DC-3	900	RPJH2	1200	117"	108"

**CABINET CONSTRUCTION:**

14 Gauge Reinforced Continuously Welded.  
45 Degree Minimum Sump Media Flow.

**FINISH:**

Durable Enamel  
Primed and Painted: Corrosion Resistant

**WORKING CHAMBER:**

Dimensions: 48"W x 36"D x 42"H  
Double Walled Doors  
Safety Door Interlocks  
Self Adjusting Door Latches  
Knife Edge, Seal Sealing, Full Gaskets  
Full Length Hinges

**VIEWING WINDOW:**

12 1/2" H x 21" W  
Quick Change, Square Cornered, Tempered Glass  
Mylar Dispenser

**LIGHTING:**

Two Tube, 24" Fluorescent Fixture Low Temperature,  
T8, Shielded, Externally Located  
120 V 60 HZ



**FOOT VALVE:**

For Instant Changing From Right to Left Foot  
On/Off Air Logic Controls

**MEDIA BLASTING NOZZLE:**

**Air (approximate)**  
**Requirements 40 PSI 60 PSI 80PSI**

(CFM)	21	32	41
<b>3/16" NOZZLE</b>			
<b>1/4" NOZZLE</b>	<b>41</b>	<b>56</b>	<b>72</b>
<b>5/16" NOZZLE</b>	<b>64</b>	<b>88</b>	<b>113</b>

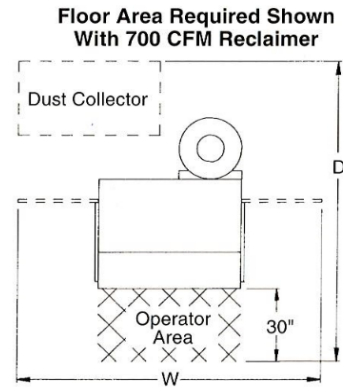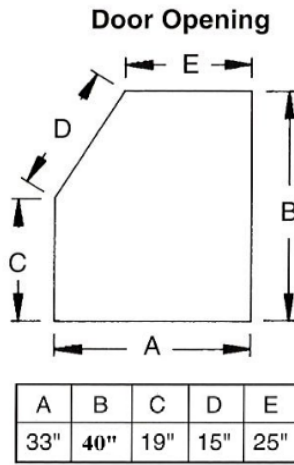

### SPECIFICATIONS

RECLAIMER	DUST BAGS	DUST COLLECTORS
Cyclone	1 Bag With 400 CFM	<b>D20 Pull Through:</b>
Centrifugal Type	1 Bag With 700 CFM	(900) CFM 2 HP
Removable Screen Basket	Zipper Bottom	52" W X 33"D X 80" H
All Steel Construction	100% Cotton Sateen	Manual Pneumatic Bagshaker
Adjustable Air Wash		49 Dust Bags
700 CFM SYSTEM:	DUST COLLECTORS	RPJ2/DRAWER
1 HP 20 Amp Service	<b>D10 Pull Through:</b>	5'10" X 2'6" X 7'9"
900 CFM SYSTEM:	(400) CFM 1/2 HP	RPJ2H/HOPPER
2 HP 3 Phase	42"W x 25"D 80" H	5'10" X 2'6" X 12'
230 Volts 8 Amp	Manual Pneumatic Bagshaker	2-36" Cartridges
460 Volts 4 Amp	25 Dust Bags	Automatic Reverse Pulse Cleaning
	(700) CFM 1 HP	M2 Pull Through:
	42"W x 25"D 80" H	2 Cartridge
	Manual Pneumatic Bagshaker	(700 ) CFM 1 HP
	25 Dust Bags	20" W x 42" D x 36" H
		M4 Pull Through:
		4 Cartridge
		(900 ) CFM 2 HP
		20" W x 42" D x 36" H

**GLOVES:**

Abrasive Resistant, Cloth Lined, Full Length Snap-In Gloves  
Static Resistant

**HOSES:**

1/2" ID Blast Hose

**BLOW OFF GUN:**

Fingertip Control Blow Off Nozzle