

MODEL 4848 SELECT



4848 SELECT MANUAL BLAST / AUTO ROTATION

THIS SYSTEM WAS DEVELOPED FOR A (AR15) BARREL MANUFACTURE.

AUTO ROTATING TABLE—TWELVE (12) STATIONS

THE OPERATOR CAN LOAD TWELVE (12) BARRELS ONTO THE WORK STATION FIXTURES, CLOSE THE DOOR AND MANUALLY BLAST TREAT. THE TABLE IS ROTATED BY A MANUAL FOOT SWITCH AS THE OPERATOR NEEDS FOR BLASTING.

AFTER BLASTING ALL TWELVE BARRELS, THE OPERATOR WILL OPEN, EITHER THE RIGHT OR LEFT DOOR FOR UNLOADING AND RE-LOADING THE FIXTURES.

WHILE THE DOOR IS OPEN, THE TABLE WILL NOT ROTATE THE INDIVIDUAL STATIONS.

THE BLAST MEDIA IS PROCESSED THROUGH OUR 900 CFM RECLAIM, CLEANED AND THE DUST IS PASSED ON TO THE M-4 CARTRIDGE, REVERSE PULSE CLEANING DUST COLLECTOR.



BLAST-IT-ALL®
Salisbury, NC 28145
(800) 535-2612
www.blast-it-all.com
sales@blast-it-all.com





4848 SELECT TECHNICAL SPECIFICATIONS

4848 Select Cabinet With Reclaimer and Dust Collectors

MODEL NUMBER	RECLAIMER CFM	DUST COLLECTOR	ESTIMATED SHIPPING WEIGHT	FLOOR AREA REQUIRED (W)	FLOOR AREA REQUIRED (D)
4848-9M4DC	900	M4DC	1200	117"	108"

RECLAIMER AND M4 DUST COLLECTOR

CABINET CONSTRUCTION:

14 Gauge Reinforced Continuously Welded.
45 Degree Minimum Sump Media Flow.

FINISH:

Durable Enamel
Primed and Painted: Corrosion Resistant

WORKING CHAMBER:

Dimensions: 48"W x 48"D x 42"H
Double Walled Doors
Safety Door Interlocks
Self Adjusting Door Latches
Knife Edge, Seal Sealing, Full Gaskets
Full Length Hinges

VIEWING WINDOW:

12 1/2" H x 21" W
Quick Change, Square Cornered, Tempered Glass
Mylar Dispenser

LIGHTING:

Two - Two Tube, 24" Fluorescent Fixture
Low Temperature,
T8, Shielded, Externally Located
120 V 60 HZ

FOOT SWITCH BLAST CONTROL

For Instant Changing From Right to Left Foot
On/Off Air Logic Controls

BLAST NOZZLE: GUN

#5 Tungsten Carbide Nozzle
5/32" Air Orifice Standard

GLOVES:


Abrasive Resistant, Cloth Lined, Full Length Snap-In Gloves
Static Resistant

HOSES:


1/2" ID Lightweight, Flexible, Abrasive Resistant

BLOW OFF GUN:

Fingertip Control Blow Off Nozzle

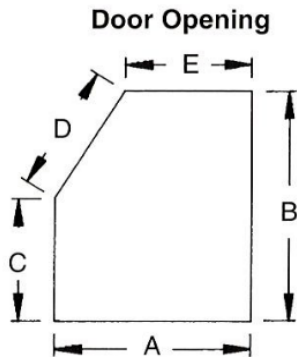

A	B	C	D	E
45"	40"	21"	21"	37"

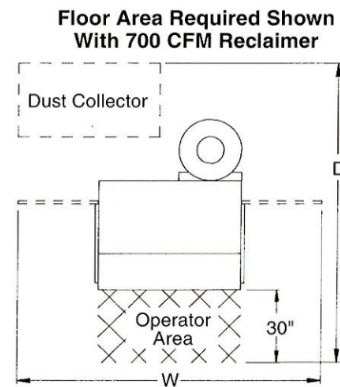

SPECIFICATIONS

RECLAIMER

Cyclone
Centrifugal Type
Removable Screen Basket
All Steel Construction
Adjustable Air Wash

DUST COLLECTORS

M4 Pull Through:

2 HP
(4) 22" Cartridges
32" W x 36" D x 87" H

900 CFM SYSTEM:

2 HP 3 Phase
230 Volts 8 Amp
460 Volts 4 Amp

