


# MODEL 3636-P



**BLAST-IT-ALL®**  
Salisbury, NC 28145  
(800) 535-2612  
[www.blast-it-all.com](http://www.blast-it-all.com)  
[sales@blast-it-all.com](mailto:sales@blast-it-all.com)



# 3636P TECHNICAL SPECIFICATIONS



**RECLAIMER AND D10 DUST COLLECTOR**

## 3636P Cabinet with Reclaimer and Dust Collectors

MODEL NUMBER	RECLAIMER CFM	DUST COLLECTOR	ESTIMATED SHIPPING WEIGHT	FLOOR AREA REQUIRED (W)	FLOOR AREA REQUIRED (D)
3636P-7	700	BAG	625	108"	86"
3636P-7DC	700	D10 DC	950	129"	92"
3636P-7M2DC	700	M2DC	1150	129"	108"
3636P-7-3	700	BAG	1175	129"	114"
3636P-7DC-3	700	D10 DC	1200	129"	120"
3636P-7-M2DC-3	700	M2DC	1200	129"	120"
3636P-9-DC-3	900	D10 DC	1200	129"	120"
3636P-9-M4DC-3	900	M4DC	1200	129"	120"
3636P-9-RPJDC-3	900	RPJ2	1200	129"	120"
3636P--9-RPJHDC-3	900	RPJH2	1200	129"	120"

**CABINET CONSTRUCTION:**

14 Gauge Reinforced Continuously Welded.  
45 Degree Minimum Sump Media Flow.

**FINISH:**

Durable Enamel  
Primed and Painted: Corrosion Resistant

**WORKING CHAMBER:**

Dimensions: 36"W x 36"D x 36"H  
Double Walled Doors  
Safety Door Interlocks  
Self Adjusting Door Latches  
Knife Edge, Seal Sealing, Full Gaskets  
Full Length Hinges

**VIEWING WINDOW:**

12 1/2" H x 21" W  
Quick Change, Square Cornered, Tempered Glass  
Mylar Dispenser

**LIGHTING:**

Two Tube, 24" Fluorescent Fixture Low Temperature,  
T8, Shielded, Externally Located  
120 V 60 HZ

**FOOT VALVE:**


For Instant Changing From Right to Left Foot  
On/Off Air Logic Controls

**MEDIA BLASTING NOZZLE:**


**Air (approximate)**  
**Requirements 40 PSI 60 PSI 80PSI**

(CFM)	21	32	41
3/16" NOZZLE	21	32	41
1/4" NOZZLE	41	56	72
5/16" NOZZLE	64	88	113

**Door Opening**

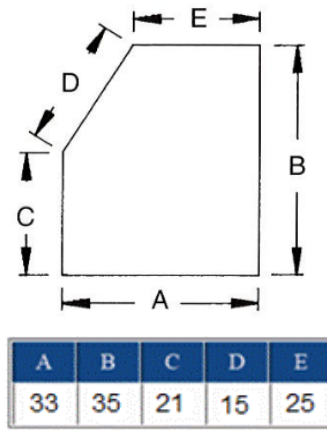

**Floor Area Required Shown With 700 CFM Reclaimer**

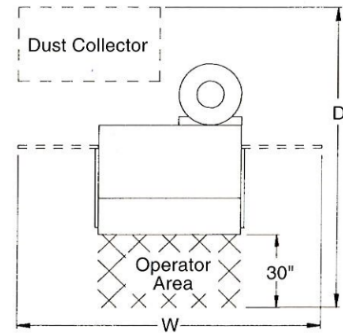

### SPECIFICATIONS

RECLAIMER	DUST BAGS	DUST COLLECTORS
Cyclone	1 Bag With 400 CFM	<b>D20 Pull Through:</b>
Centrifugal Type	1 Bag With 700 CFM	(900) CFM 2 HP
Removable Screen Basket	Zipper Bottom	52" W X 33"D X 80" H
All Steel Construction	100% Cotton Sateen	Manual Pneumatic Bagshaker
Adjustable Air Wash		49 Dust Bags
700 CFM SYSTEM:	DUST COLLECTORS	M2 Pull Through:
1 HP 20 Amp Service	<b>D10 Pull Through:</b>	2 Cartridge
900 CFM SYSTEM:	(400) CFM 1/2 HP	(700 ) CFM 1 HP
2 HP 3 Phase	42"W x 25"D 80" H	20" W x 42" D x 36" H
230 Volts 8 Amp	Manual Pneumatic Bagshaker	<b>M4 Pull Through:</b>
460 Volts 4 Amp	25 Dust Bags	4 Cartridge
	(700) CFM 1 HP	(900 ) CFM 2 HP
	42"W x 25"D 80" H	20" W x 42" D x 36" H
	Manual Pneumatic Bagshaker	
	25 Dust Bags	

**GLOVES:**

Abrasive Resistant, Cloth Lined, Full Length Snap-In Gloves  
Static Resistant

**HOSES:**

1/2" ID Lightweight, Flexible, Abrasive Resistant

**BLOW OFF GUN:**

Fingertip Control Blow Off Nozzle