

MODEL 3636-7P



SHOWN WITH OPTIONAL DOOR PORTS



BLAST-IT-ALL®
Salisbury, NC 28145
(800) 535-2612
www.blast-it-all.com
sales@blast-it-all.com



3636-7P TECHNICAL SPECIFICATIONS



RECLAIMER AND D10 DUST COLLECTOR

3636P Cabinet with Reclaimer and Dust Collectors

MODEL NUMBER	RECLAIMER CFM	DUST COLLECTOR	ESTIMATED SHIPPING WEIGHT	FLOOR AREA REQUIRED (W)	FLOOR AREA REQUIRED (D)
3636P-7P	700	BAG	625	108"	86"
3636P-7PDC	700	D10 DC	950	129"	92"
3636P-7PM2DC	700	M2DC	1150	129"	108"
3636P-7P-3	700	BAG	1175	129"	114"
3636P-7PDC-3	700	D10 DC	1200	129"	120"
3636P-7PM2DC-3	700	M2DC	1200	129"	120"
3636P-9PDC-3	900	D10 DC	1200	129"	120"
3636P-9PM4DC-3	900	M4DC	1200	129"	120"
3636P-9PRPJDC-3	900	RPJ2	1200	129"	120"
3636P-9PRPJHDC-3	900	RPJH2	1200	129"	120"

CABINET CONSTRUCTION:

14 Gauge Reinforced Continuously Welded.
45 Degree Minimum Sump Media Flow.

FINISH:

Durable Enamel
Primed and Painted: Corrosion Resistant

WORKING CHAMBER:

Dimensions: 36"W x 36"D x 36"H
Double Walled Doors
Safety Door Interlocks
Self Adjusting Door Latches
Knife Edge, Seal Sealing, Full Gaskets
Full Length Hinges

VIEWING WINDOW:

12 1/2" H x 21" W
Quick Change, Square Cornered, Tempered Glass
Mylar Dispenser

LIGHTING:

Two Tube, 24" Fluorescent Fixture Low Temperature,
T8, Shielded, Externally Located
120 V 60 HZ

FOOT VALVE:


For Instant Changing From Right to Left Foot
On/Off Air Logic Controls

MEDIA BLASTING NOZZLE:


Air (approximate)
Requirements 40 PSI 60 PSI 80PSI

(CFM)	21	32	41
3/16" NOZZLE	21	32	41
1/4" NOZZLE	41	56	72
5/16" NOZZLE	64	88	113

Door Opening

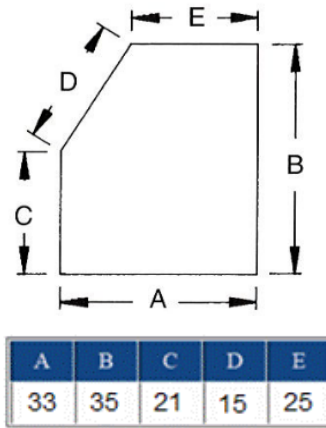

Floor Area Required Shown With 700 CFM Reclaimer



SPECIFICATIONS

RECLAIMER	DUST BAGS	DUST COLLECTORS
Cyclone	1 Bag With 700 CFM	D20 Pull Through:
Centrifugal Type	Zipper Bottom	(900) CFM 2 HP
Removable Screen Drawer	100% Cotton Sateen	52" W X 33"D X 80" H
All Steel Construction		Manual Pneumatic Bagshaker
Adjustable Air Wash		49 Dust Bags
700 CFM SYSTEM:	DUST COLLECTORS	M2 Pull Through:
1 HP 20 Amp Service	D10 Pull Through:	2 Cartridge
900 CFM SYSTEM:	(700) CFM 1 HP	(700) CFM 1 HP
2 HP 3 Phase	42"W x 25"D 80" H	20" W x 42" D x 36" H
230 Volts 8 Amp	Manual Pneumatic Bagshaker	M4 Pull Through:
460 Volts 4 Amp	25 Dust Bags	4 Cartridge
		(900) CFM 2 HP
		20" W x 42" D x 36" H

GLOVES:

Abrasive Resistant, Cloth Lined, Full Length Snap-In Gloves
Static Resistant

HOSES:

1/2" ID Lightweight, Flexible, Abrasive Resistant

BLOW OFF GUN:

Fingertip Control Blow Off Nozzle